

# STRAKE | STRAW RAKE



# SUMO

GROWING  
WITH YOU

SHALLOW TILLAGE

The STRAKE is a versatile harrow which offers a multitude of benefits. The even distribution of chaff and straw combined with mixing with soil is essential when encouraging the growth of unwanted seeds including black grass and removing breeding grounds and food sources for slugs.

Rows of tungsten tipped tines cover the ground, eliminating clumps of straw whilst cultivating the surface, creating a shallow tilth, to chit rogue seeds. It's an essential machine for both strip-till and direct drilling.

## 1 - Retractable tines

Alternate rows of tines can be hydraulically raised out of work, increasing the spacing from 75mm to 150mm. Improving the flow of material heavy in trashy conditions.

In addition, the working angle of the tines can be hydraulically adjusted too



## 2 - Spring tines


Spring tines provide a positive force on the stubble, ensure the tips remain in work whilst following the ground and providing protection.

## 3 - Tungsten tips

Hard-wearing 15mm wide tungsten tips slice through the ground and organic matter, evenly distributing organic matter and creating a well mixed, shallow tilth.

The Mounted STRAKE is available with a Cat 3 headstock and hydraulically folds for simple and convenient transport.

The trailed STRAKE features a Cat 3 ring hitch with Cat 4 & 5, K80 spoon and lower link options. 560/45 22.5 tyres transport the machine and combine with resin filled depth wheels, ensuring trailed models work at a consistent and uniform depth. The hydraulic folding frame makes moving from field to field simple and quick.

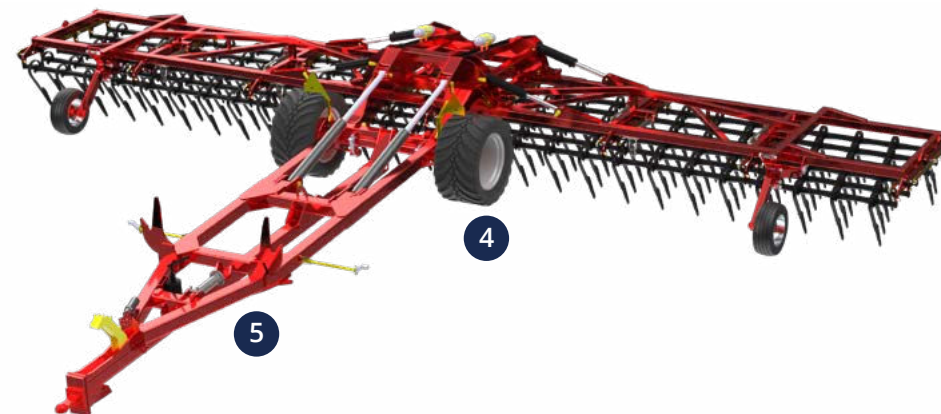

## 4 - Tyres

When in work the transport wheels and resin filled depth wheels combine to provide a consistent working depth and tilth.

- + Eliminates mats of wet straw
- + Creates a shallow tilth
- + Promotes chitting of weeds

## 5 - Drawbar

A choice of drawbar attachments combine with the adjustable chassis to ensure the STRAKE tines all work at the same depth.

- + Eliminates habitats for slugs
- + Promotes healthy soils
- + Reduces herbicide usage

### STRAKE - MOUNTED & TRAILED

Model	Working Width	Transport Width	Number of Tines	Tine Spacing	Weight
S6 - Mounted	6.1m	2.50m	80	75mm or 150mm	2,435kg
S8 - Mounted	8.1m	3.00m	107	75mm or 150mm	3,100kg
S12 - Trailed	12.1m	3.00m	160	75mm or 150mm	7,950kg

DEEP TILLAGE

SHALLOW TILLAGE

DRILLING TECHNOLOGY

GRASSLAND MACHINERY

Sumo UK Ltd  
Redgates, Melbourne, York, YO42 4RG  
United Kingdom

[www.sumo1.com](http://www.sumo1.com)



GROWING  
WITH YOU